


DSP-4210GM
Data board change procedure
(When multiple thin lines occur in-group)

Daewoo Electronics

Step 1.

Un-screw the following locations.

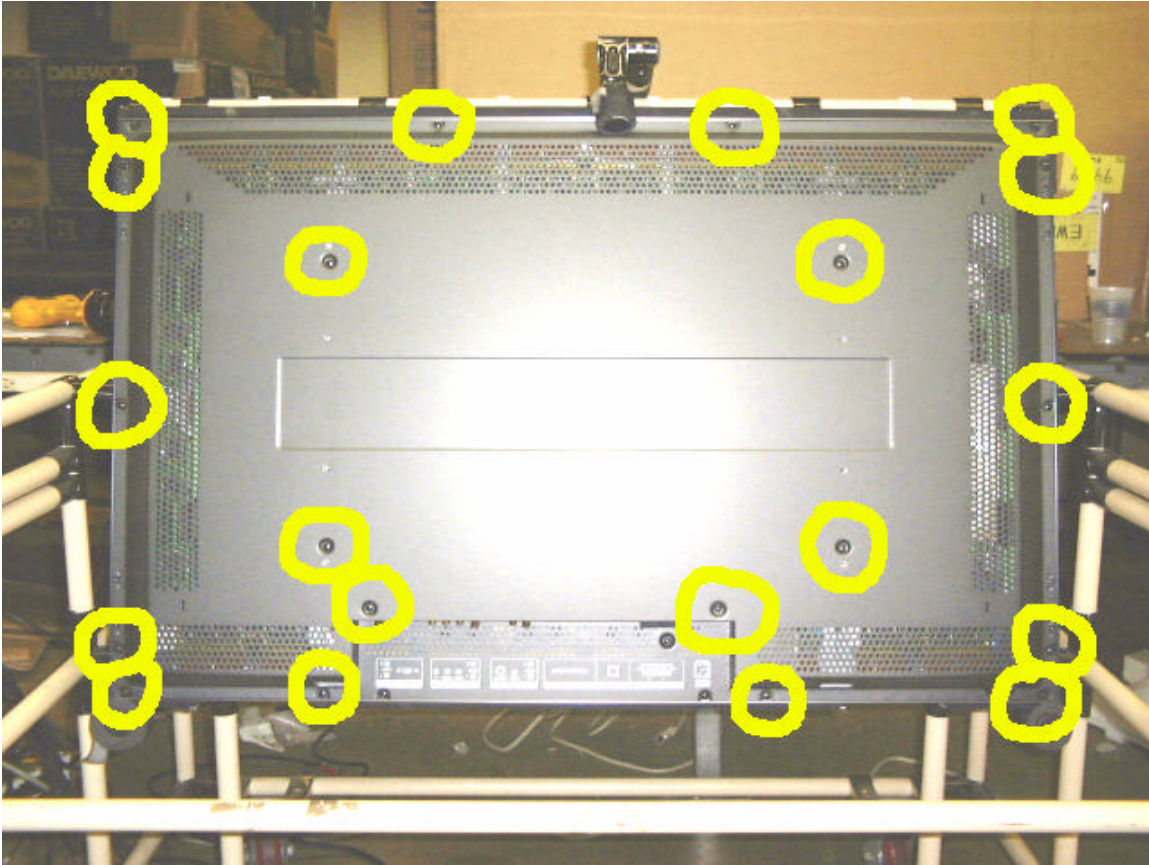


This is backside of PDP. The circled locations are where the screws in order to take off the back panel.

Step 2

Look for the position of the lines occur.




Close Look

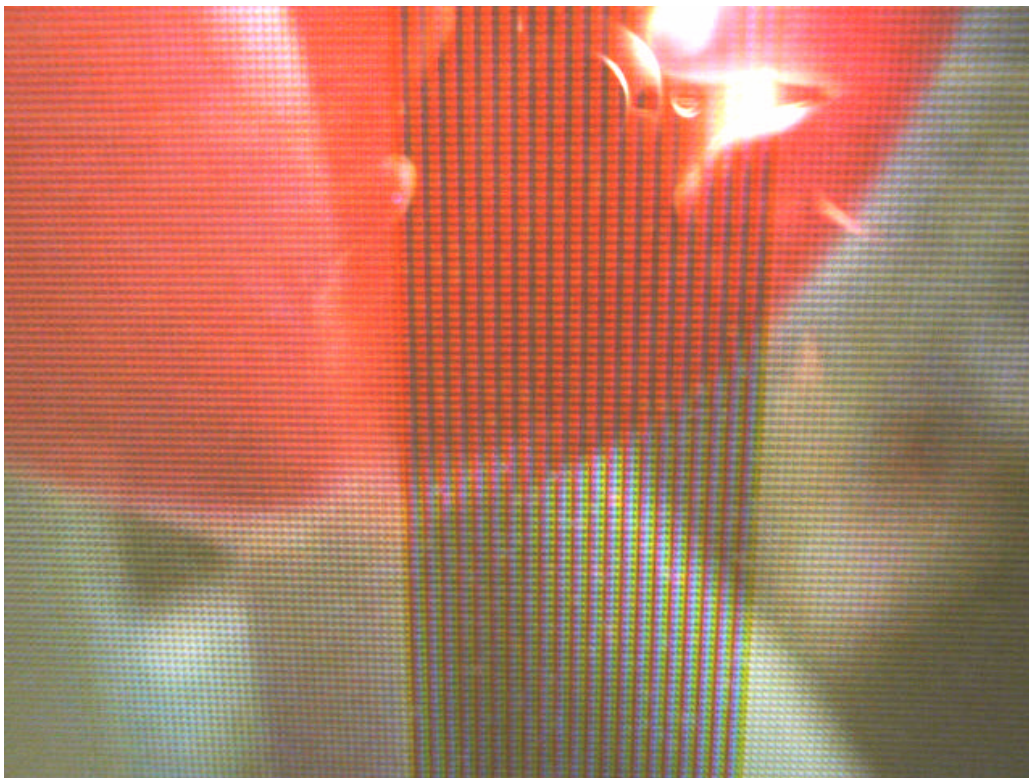

If the lines occur in the middle of screen, disassemble the connector part.


Step 3.

Unscrew those positions.

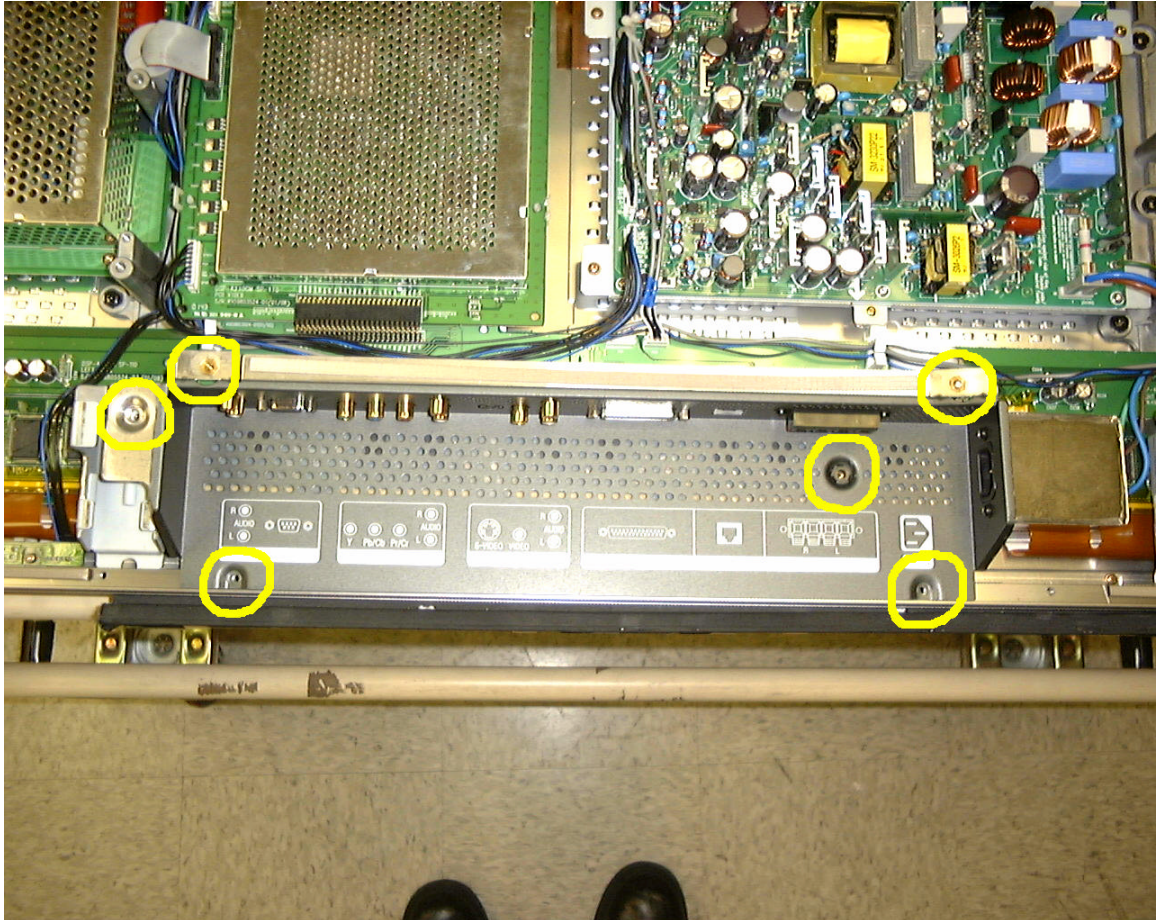


Step 4

Take out the wires and the connector.

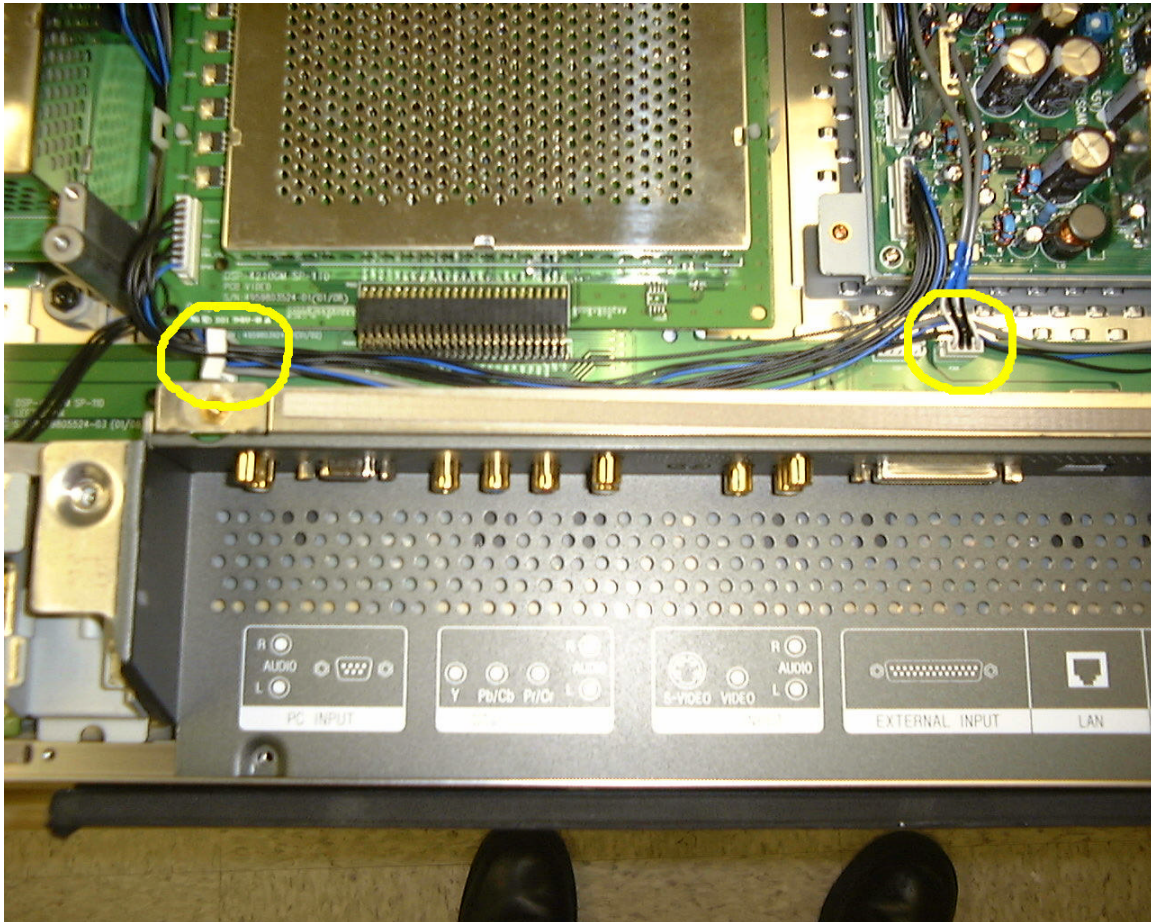

Step 5.
Slide out the input connector consol.

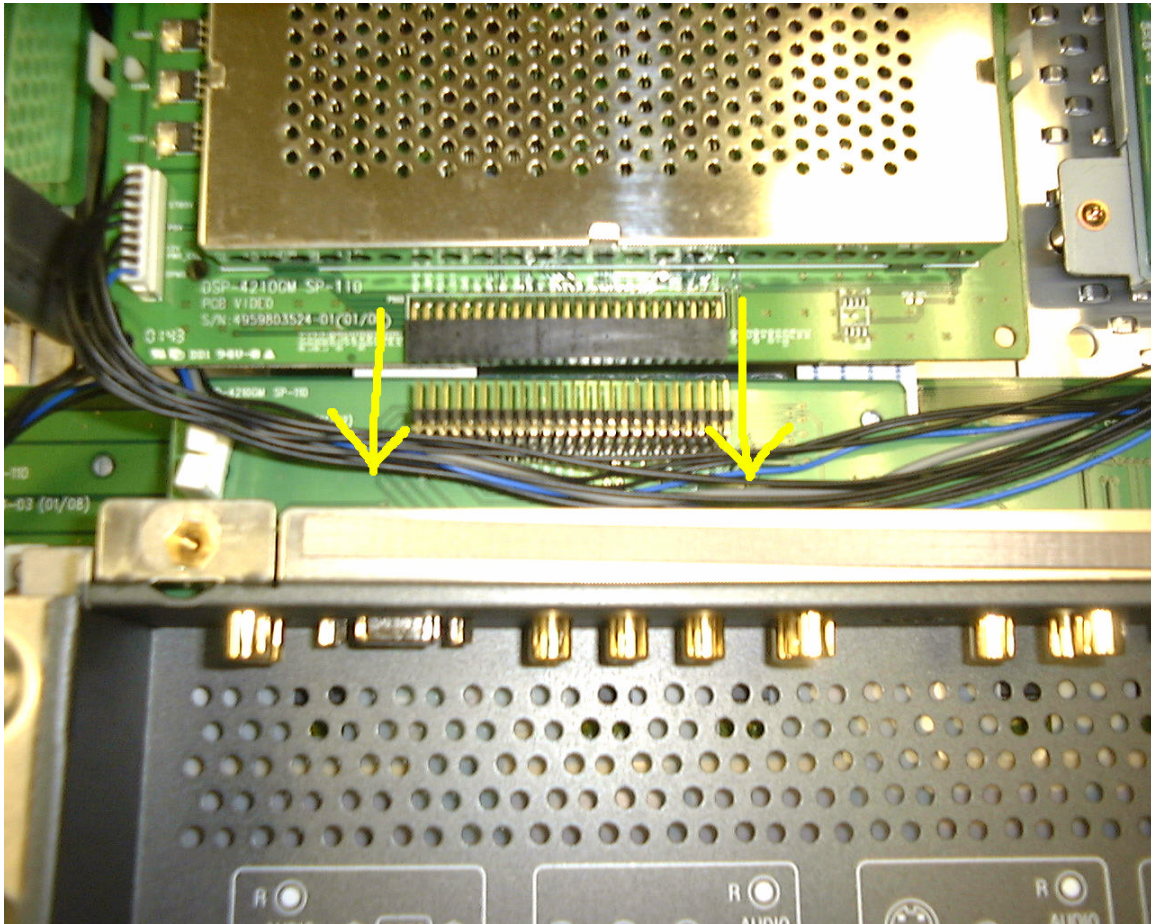


**** Note ****


Input connecting consol is still connected with power cable. Therefore, Do not pull the consol to get completely separate from the main unit.

Step 6.


Picture after input connecting consol is detached.

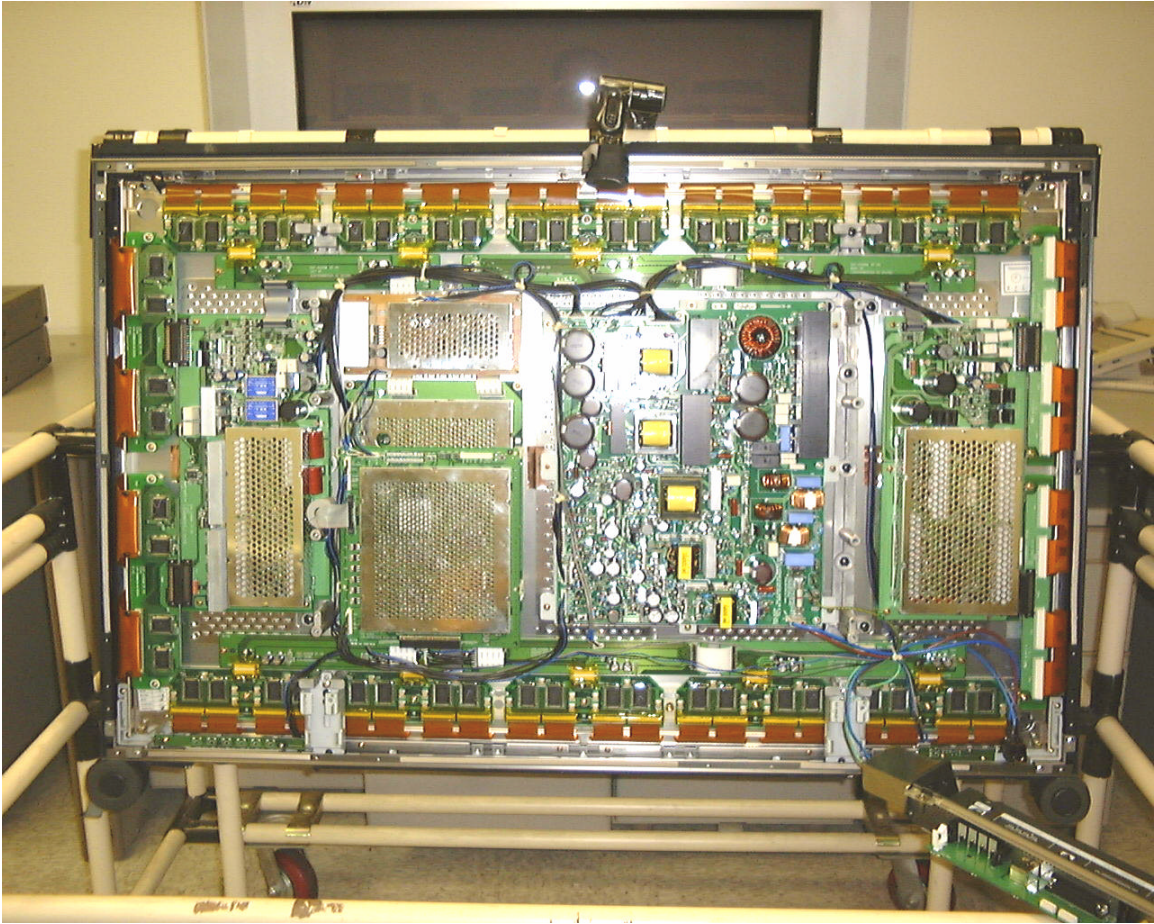

Step 7.
Check if any connection is loosed.

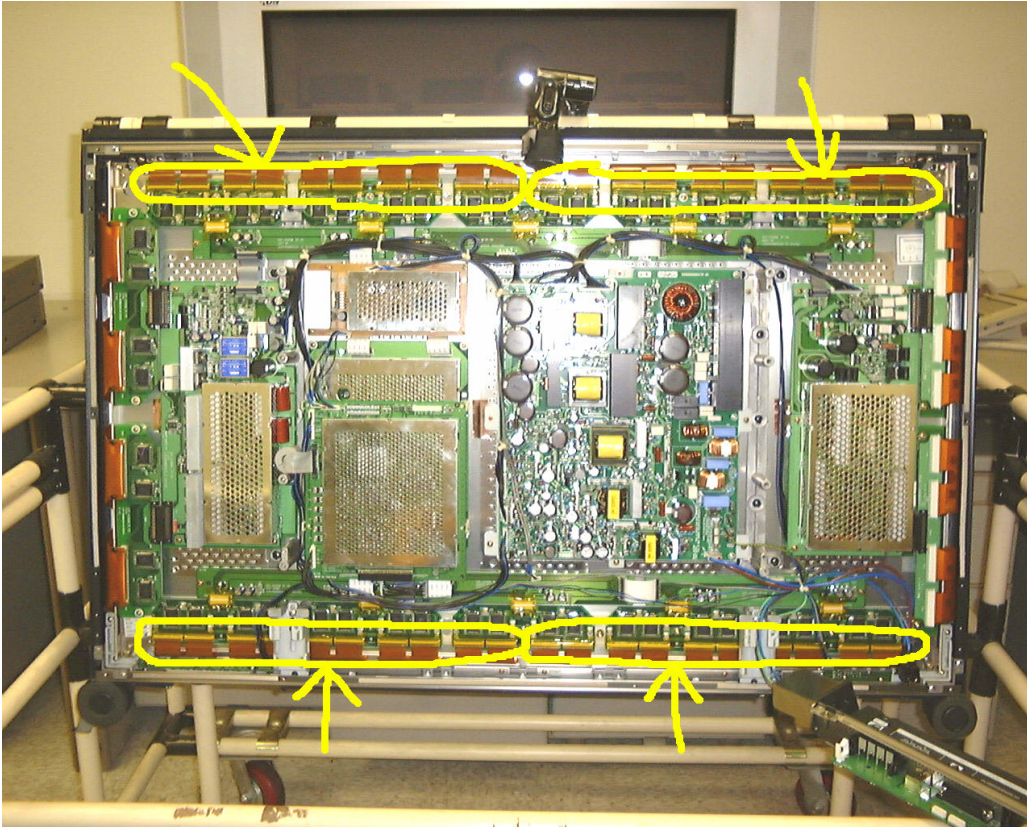

Close Look

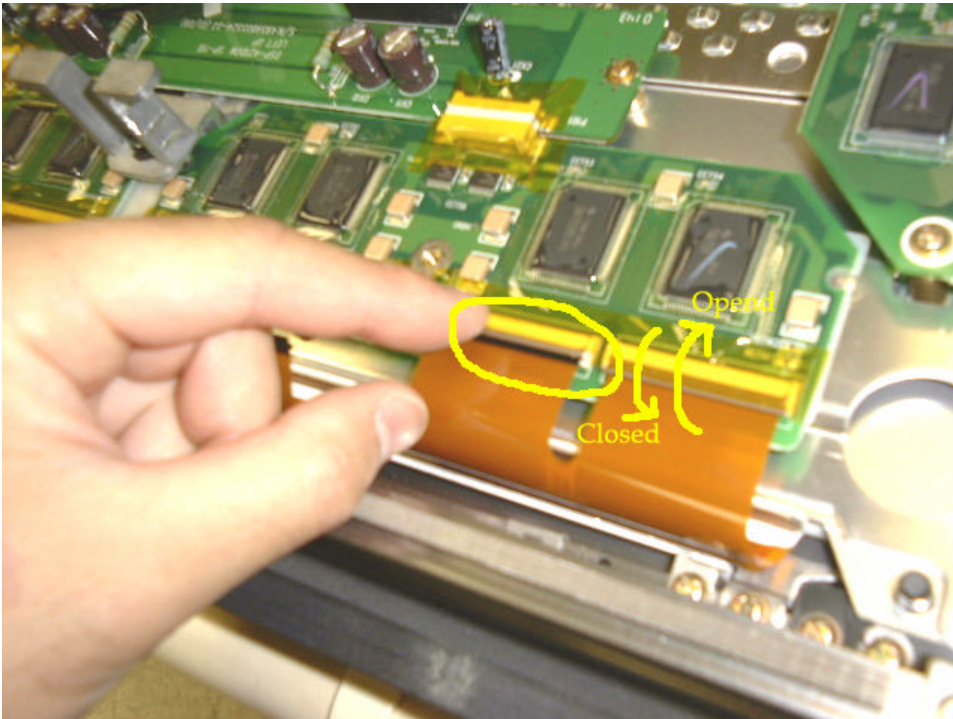

If there is no connector that is loosed, change data-board.

Step 7.

Change Data-board.

See Data-board Change procedure.

Step 8.

Changing Data-board controller. (Step 8 ~ Step ??)

Location of Data-board Controller

